Classified by
Underwriters Laboratories, Inc.
to UL 1479 and CAN/ULC-S115

System No. W-L-8013

ANSI/UL1479 (ASTM E814)	CAN/ULC S115
F Ratings — 1 and 2 Hr (See Item 1)	F Ratings — 1 and 2 Hr (See Item 1)
T Rating — 0 Hr	FT Rating — 0 Hr
L Rating At Ambient — 5 CFM/sq ft	FH Ratings — 1 and 2 Hr (See Item 1)
L Rating At 400 F — 2 CFM/sq ft	FTH Rating — 0 Hr
	L Rating At Ambient — 5 CFM/sq ft
	L Rating At 400 F — 2 CFM/sq ft

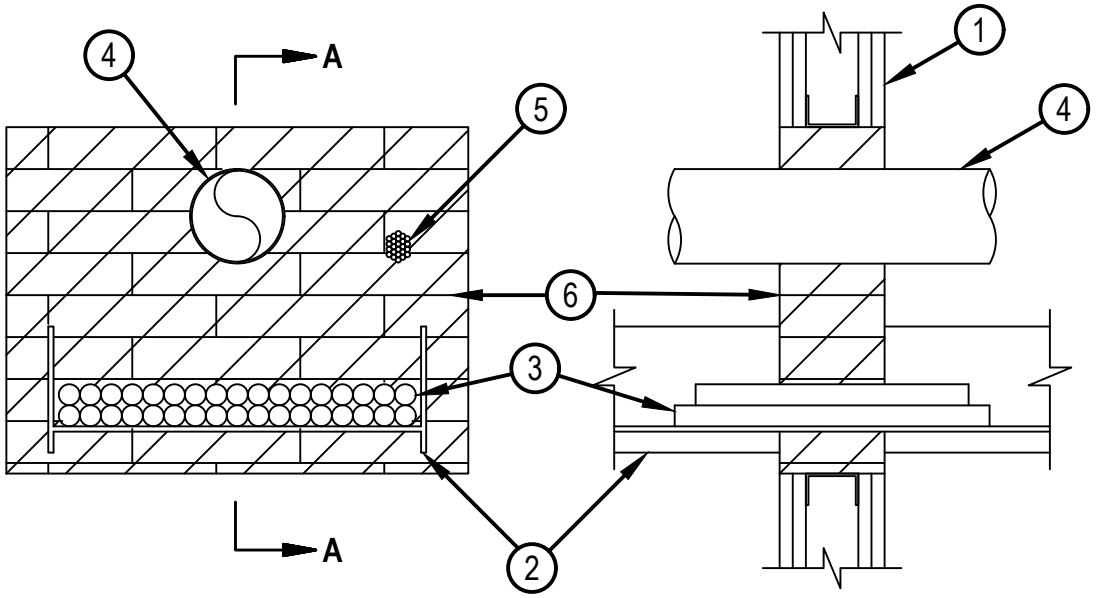

SECTION A-A

System tested with a pressure differential of 2.5 Pa between the exposed and the unexposed surfaces with the higher pressure on the exposed side.

1. Wall Assembly — The 1 or 2 hr fire-rated gypsum board/stud wall assembly shall be constructed of the materials and in the manner specified in the individual U300, U400, V400 or W400 Series Wall and Partition Designs in the UL Fire Resistance Directory and shall include the following construction features:
   A. Studs — Wall framing may consist of either wood studs or steel channel studs. Wood studs to consist of nom 2 in. (51 mm) by 4 in. (102 mm) lumber spaced 16 in. (406 mm) OC. Steel studs to be min 2-1/2 in. (64 mm) wide and spaced max 24 in. (610 mm) OC. Additional studs installed to completely frame the opening.
   B. Gypsum Board* — 5/8 in. (16 mm) thick, 4 ft (1219 mm) wide with square or tapered edges. The gypsum board type, thickness, number of layers, fastener type and sheet orientation shall be as specified in the individual Wall and Partition Design. Max area of opening is 352 sq in. (2271 sq cm) with max dimension of 22 in. (559 mm) wide.
   The hourly F and FH Ratings of the firestop system are equal to the hourly fire rating of the wall assembly in which it is installed.
2. Cable Tray* — Max 18 in. (457 mm) wide by max 6 in. (152 mm) deep open-ladder or solid-back cable tray with channel-shaped side rails formed of 0.065 in. (1.65 mm) thick aluminum or 0.060 in. (1.52 mm) thick steel and with 1-1/2 in. (38 mm) wide by 1 in. (25 mm) channel shape rungs spaced 9 in. (229 mm) OC or a 0.029 in. (0.74 mm) thick steel solid back, respectively. One cable tray to be installed in the opening. The max annular space between the cable tray and the periphery of the opening shall be min 1 in. (25 mm) to max 7 in. (178 mm) Cable tray to be rigidly supported on both sides of floor or wall assembly.

System No. W-L-8013

3. Cables — Aggregate cross-sectional area of cables in cable tray to be max 30 percent of the cross-sectional area of the cable tray. Any combination of the following types and sizes of copper conductor cables may be used:
   A. 7/C No. 12 AWG with polyvinyl chloride (PVC) insulation and PVC jacket.
   B. 100 pair - No. 24 AWG cable with PVC insulation and jacket.
   C. 1/C, 750 kcmil (or smaller) with PVC insulation and jacket.
4. Through-Penetrants — One or more pipe or tube to be installed within the opening. The total number of through-penetrants is dependent on the size of the opening and types and sizes of the penetrants. Any combination of the penetrants described below may be used provided that the following parameters relative to the annular spaces and the spacings between the pipes are maintained. The space between the pipe or tube and the periphery of the opening shall be min 1-1/2 in. (38 mm) to max 9-1/4 in. (235 mm). Pipe or tube to be rigidly supported on both sides of floor or wall assembly. The following types and sizes of non-metallic or metallic pipes, or tubes may be used:
   A. Polyvinyl Chloride (PVC) Pipe — Max 3 in. (76 mm) diam Schedule 40 solid core PVC pipe (or smaller) for use in closed (process or supply) or vented (drain, waste or vent) piping system.
   B. Steel Pipe — Nom 6 in. (152 mm) diam (or smaller) Schedule 40 (or heavier) steel pipe.
   C. Conduit — Nom 4 in. (102 mm) diam (or smaller) steel electrical metallic tubing or 6 in. (152 mm) diam steel conduit.
   D. Copper Pipe — Nom 4 in. (102 mm) diam (or smaller) Regular (or heavier) copper pipe.
   E. Copper Tube — Nom 4 in. (102 mm) diam (or smaller) Type L (or heavier) copper tube.

4A. Pipe Covering — (Not Shown) — Nom 1-1/2 in. (38 mm) thick hollow cylindrical heavy density (min 3.5 pcf) (56kg/m3/) glass fiber units jacketed on the outside with an all service jacket. Longitudinal joints sealed with metal fasteners or factory applied self-sealing lap tape. Transverse joints secured with metal fasteners or with butt tape supplied with the product.
   See Pipe and Equipment Covering and Materials (BRGU) category in the Building Materials Directory for names of manufacturers. Any pipe covering material meeting the above specifications and bearing the UL Classification Marking with a Flame Spread Index of 25 or less and a Smoke Developed Index of 50 may be used.

5. Cables — Max 1-1/2 in. (38 mm) diam tight bundle of cables installed within the opening and rigidly supported on both surfaces of wall. The space between the cables and periphery of the opening shall range from 1-3/16 in. (30.2 mm) min to a max of 1-1/2 in. (38 mm). Any combination of the following types and sizes of cables may be used:
   A. 7/C No. 12 AWG with polyvinyl chloride (PVC) insulation and jacket.
   B. 25 pair - No. 24 AWG cable with PVC insulation and jacket.
   C. Type R GU/59 coaxial cable with PVC outer jacket.
   D. 24 fiber optic cable with PVC sub unit and outer jacket.
6. Firestop System — The firestop system shall consist of the following:
   A. Fill, Void or Cavity Material* — Fire Blocks For walls incorporating max 3-5/8 in. (92 mm) steel studs or max 2 (51 mm) by 4 in. (102 mm) wood studs, fire block installed with 5 in. (127 mm) dimension projecting through and centered in opening. For walls constructed of larger steel or wood studs, fire block installed with long dimension passing through and centered in opening. Blocks may or may not be cut flush with both surfaces of wall. When multiple layers of gypsum board are used, blocks may be recessed 1/2 in. (13 mm) from surface of wall. Blocks to be firmly packed in opening. Either one or a combination of the block types specified below may be used.
   HILTI CONSTRUCTION CHEMICALS, DIV OF HILTI INC — CFS-BL Firestop Block
   B. Fill, Void or Cavity Material* — Sealant or Putty — Fill material to be forced into interstices of cables, between cables and cable trays, around each penetrant and where obvious voids are observed to max extent possible on both surfaces of the penetration.
   HILTI CONSTRUCTION CHEMICALS, DIV OF HILTI INC — FS-One Sealant, FS-ONE MAX Intumescent Sealant, CP 618 Putty Stick, CP 660 Firestop Foam or CP620 Fire Foam

* Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.